

УДК 532.51

The 2D Motion of Perfect Fluid with a Free Surface

Victor K. Andreev*

Institute of Computational Modelling SB RAS
 Akademgorodok, 50/44, Krasnoyarsk, 660036
 Institute of Mathematics and Computer Science
 Siberian Federal University
 Svobodny, 79, Krasnoyarsk, 660041
 Russia

Received 10.10.2014, received in revised form 10.11.2014, accepted 20.12.2014

The 3D continuous subalgebra is used to searching new partially invariant solution of incompressible perfect fluid equations. It can be interpreted as a non-stationary motion of a plane layer with one free surface. The velocity field and pressure are determined in analytical form by using Lagrangian coordinates.

Keywords: perfect fluid, partially invariant solution, non-stationary motion, free surfaces.

Governing flow equations and main results

The Euler equations for 2D motions of a perfect fluid are recorded by

$$\begin{aligned} u_t + uu_x + vu_y + \frac{1}{\rho} p_x &= 0, & u_x + v_y &= 0, \\ v_t + uv_x + vv_y + \frac{1}{\rho} p_y &= 0, \end{aligned} \quad (1)$$

where ρ is the constant fluid density, u and v are the velocity components in the x and y directions, respectively, p is the pressure. The group of point transformations admitted by the system (1) is computed in [1]. Corresponding this group basic continuous Lie algebra includes the three parametrical subalgebra $\langle \partial_x, t\partial_u + \partial_x, \partial_p \rangle$. It has the invariants t , y , v and partly invariant solution of (1) rang two and defect two necessary to seek in the form $u = u(x, y, t)$, $v = v(y, t)$, $p = p(x, y, t)$. From continuity equation $u_x + v_y = 0$ we obtain the relations

$$u(x, y, t) = u_1(y, t)x + u_2(y, t), \quad u_1(y, t) + v_y(y, t) = 0. \quad (2)$$

Impulse equations (1) are equivalent to the following

$$\begin{aligned} u_{1t} + vu_{1y} + u_1^2 &= f(t), & \frac{1}{\rho} p &= l(y, t) - f(t) \frac{x^2}{2}, \\ l_y &= -v_t - vv_y, & u_{2t} + vu_{2y} + u_1 u_2 &= 0 \end{aligned} \quad (3)$$

with arbitrary function $f(t)$.

Let us introduce the Lagrangian coordinates (η, t) by the solving Cauchy problem

$$\frac{dy}{dt} = v(y, t), \quad y|_{t=0} = \eta. \quad (4)$$

*andr@icm.krasn.ru

We introduce the following denotations

$$\overset{\circ}{u}_1(\eta, t) = u_1(y(\eta, t), t), \quad \overset{\circ}{u}_2(\eta, t) = u_2(y(\eta, t), t), \quad \overset{\circ}{v}(\eta, t) = v(y(\eta, t), t),$$

where $y(\eta, t)$ is a solution of (4). Then the first equations (3) can be reduced to Riccati equation

$$\overset{\circ}{u}_{1t} + \overset{\circ}{u}_1^2 = f(t).$$

It has general solution

$$\overset{\circ}{u}_1(\eta, t) = \frac{\partial}{\partial t} \left\{ \ln \left[g(t) \left(1 + u_{10}(\eta) \int_0^t \frac{1}{g^2(t)} dt \right) \right] \right\}. \quad (5)$$

Here $g(t)$ is the solution of the Cauchy problem

$$g'' - f(t)g = 0, \quad g(0) = 1, \quad g'(0) = 0, \quad (6)$$

and $u_{10}(\eta)$ is the initial value of function $u_1(y, t)$.

The another functions can be found by the formulae

$$y(\eta, t) = \frac{1}{g(t)} \int_0^\eta \left[1 + u_{10}(\eta) \int_0^t \frac{1}{g^2(t)} dt \right]^{-1} d\eta; \quad (7)$$

$$\overset{\circ}{v}(\eta, t) = - \int_0^\eta \overset{\circ}{u}_1(\eta, t) \exp \left[- \int_0^t \overset{\circ}{u}_1(\eta, t) dt \right] d\eta; \quad (8)$$

$$\overset{\circ}{u}_2(\eta, t) = u_{20}(\eta) \exp \left[- \int_0^t \overset{\circ}{u}_1(\eta, t) dt \right]; \quad (9)$$

$$\overset{\circ}{l}(\eta, t) = l_1(t) - \int_0^\eta \overset{\circ}{v}_t(\eta, t) \exp \left[- \int_0^t \overset{\circ}{u}_1(\eta, t) dt \right] d\eta \quad (10)$$

with arbitrary function $l_1(t)$. So, all unknowns can be determined in analytical form.

Now we show that this solution can be interpreted as an unsteady motion in a strip with one free boundary, see Fig. 1.

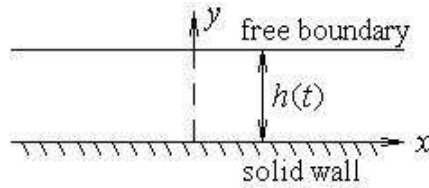


Fig. 1 Geometry of the motion

Really, at the initial time liquid fills the strip of thickness $y = h_0 = \text{const}$. The line $y = 0$ is a rigid wall. Initial velocity field has the form $u_0(x, y) = u_{10}(y)x + u_{20}(y)$, $v_0(y) = - \int_0^y u_{10}(y) dy$, $v_0(0) = 0$. The upper line $y = h_0$ is a free boundary and at the initial time the pressure $p(h_0, 0)$ coincides with outer pressure $p_{\text{out}} = p_{10} + p_{00}x^2/2$. For all $t > 0$ the strip motion is described

by the formulae are found above, where $p_{\text{out}} = p_1(t) - p_0(t)x^2/2$ must be given, so $f(t) = p_0(t)$, $f(0) = p_{00}$. The evolution of the free boundary is defined as

$$h(t) = \frac{1}{g(t)} \int_0^{h_0} \left[1 + u_{10}(\eta) \int_0^t \frac{1}{g^2(t)} dt \right]^{-1} d\eta. \quad (11)$$

Let us consider two simple cases of the solution (5)–(11), when $u_{10} = a = \text{const}$ or $u_{10} = b\eta$, $b = \text{const}$. For the first case the exact solution can be written in Eulerian coordinates as

$$\begin{aligned} u(x, y, t) &= \frac{\partial}{\partial t} \ln G(t)x + \frac{1}{G(t)} u_{20}(G(t)y), \\ v(y, t) &= -\frac{\partial}{\partial t} \ln G(t)y, \\ \frac{1}{\rho} p(x, y, t) &= l_1(t) + \frac{\partial^2}{\partial t^2} \ln G(t) \frac{y^2}{2} - f(t) \frac{x^2}{2}, \end{aligned} \quad (12)$$

where

$$G(t) = g(t) \left[1 + a \int_0^t \frac{1}{g^2(t)} dt \right]. \quad (13)$$

The equation of the free boundary is

$$y = h(t) = \frac{h_0}{G(t)}. \quad (14)$$

If we take $g(t) = \cos \omega t$, $f(t) = -\omega^2$ ($g(t) = \text{ch } \omega t$, $f(t) = \omega^2$), $\omega = \text{const}$, then the solution exists up to the time $t_* = \pi/2\omega$ (exists for all time). The solution has to be periodic one if $g(t) = 2 - \cos \omega t$, $f(t) = \omega^2 \cos \omega t (2 - \cos \omega t)^{-1}$.

For the second case the formulae have a more complicated shapes and we give here only equation of the free boundary, namely,

$$y = h(t) = \frac{1}{bg(t) \int_0^t g^{-2}(t) dt} \ln \left[1 + bh_0 \int_0^t g^{-2}(t) dt \right]. \quad (15)$$

Remark 1. In well-known [2] solutions are sought of the shape $\psi(x, y, t) = F(y, t)x + G(y, t)$ for stream function ($u_1 = \psi_y$, $v_1 = -\psi_x$). The unknowns satisfy the eq's

$$F_{ty} + (F_y)^2 - FF_{yy} = f_1(t), \quad G_{ty} + F_y G_y - FG_{yy} = f_2(t),$$

$$G = \int U dy - hF + h'_t y, \quad h''_{tt} - f_1(t)h = f_2(t).$$

Some particular solution are presented in handbook, see [2, table 13.9, p. 944]. But in this paper we have found exact solution in analytical form.

The problem has a stationary solution. Indeed, the function $v(y)$ satisfies the eq'n $vv_{yy} - v_y^2 = -f_0 = \text{const}$ with general solution

$$\begin{aligned} \text{a) } v &= \sqrt{\frac{f_0}{|C_1|}} \sin \left[\sqrt{|C_1|} (C_2 \pm y) \right], \quad f_0 > 0, \quad C_1 < 0; \\ \text{b) } v &= \pm \sqrt{f_0} (C_2 \pm y), \quad f_0 > 0, \quad C_1 = 0; \\ \text{c) } v &= \sqrt{\frac{|f_0|}{C_1}} \text{ch} \left[\sqrt{C_1} (C_2 \pm y) \right], \quad f_0 < 0, \quad C_1 > 0; \\ \text{d) } v &= \sqrt{\frac{f_0}{C_1}} \text{sh} \left[\sqrt{C_1} (C_2 \pm y) \right], \quad f_0 > 0, \quad C_1 > 0. \end{aligned}$$

However, the only case a) has a physical meaning. Really, let us take $h_0 = \pi/\sqrt{|C_1|}$, then we obtain formulae

$$u = -\sqrt{f_0} x \cos \frac{\pi y}{h_0}, \quad v = \frac{h_0 \sqrt{f_0}}{\pi} \sin \frac{\pi y}{h_0},$$

$$\frac{1}{\rho} p = l_0 - \frac{f_0}{2} \left(x^2 + \frac{h_0^2}{\pi^2} \sin^2 \frac{\pi y}{h_0} \right), \quad l_0 = \text{const} > 0,$$

which describe the flow in a strip $0 < y < h_0$, $|x| < \infty$, with rigid walls $y = 0, h_0$. The solution obtained is the periodical with respect variable y .

Conclusion

The partially invariant solution of the perfect fluid equations is investigated. This new solution describes the unsteady motion with a free surface. As was shown by examples the solution may have collapse in finite time or to be periodical one. Note that this phenomenon depends on pressure gradient $f(t)$. There have been previous works devoted to exact solutions of perfect fluid motions with a free surface [3].

This work is supported by the SB RAS (project 44).

References

- [1] A.A.Buchnev, A Lie group admissible for the equations of an ideal incompressible fluid, *Dinamika Sploshnoy Sredy*, Novosibirsk, (1971), no. 7, 212–214 (in Russian).
- [2] A.D.Polyanin, V.F.Zaitsev, Handbook of nonlinear partial differential equations, *CRC Press. Taylor and Francis Group*, 2012, 942–949.
- [3] V.K.Andreev, O.V.Kaptsov, V.V.Pukhnachev, A.A.Rodionov, Application of Group Theoretical Methods in Hydrodynamics, *Kluwer Acad. Publ.*, Dordrecht, Boston, London, 2010.

Двумерное движение идеальной жидкости со свободной поверхностью

Виктор К. Андреев

Непрерывная трёхмерная подалгебра используется для нахождения нового частично инвариантного решения уравнений идеальной несжимаемой жидкости. Оно интерпретируется как нестационарное движение плоского слоя со свободной поверхностью. При этом поля скоростей и давлений определяются (с помощью переменных Лагранжа) в аналитическом виде.

Ключевые слова: идеальная жидкость, частично инвариантное решение, нестационарное движение, свободная поверхность.